



4CH / 8CH / 16CH H.264 D1 Real Time DVR

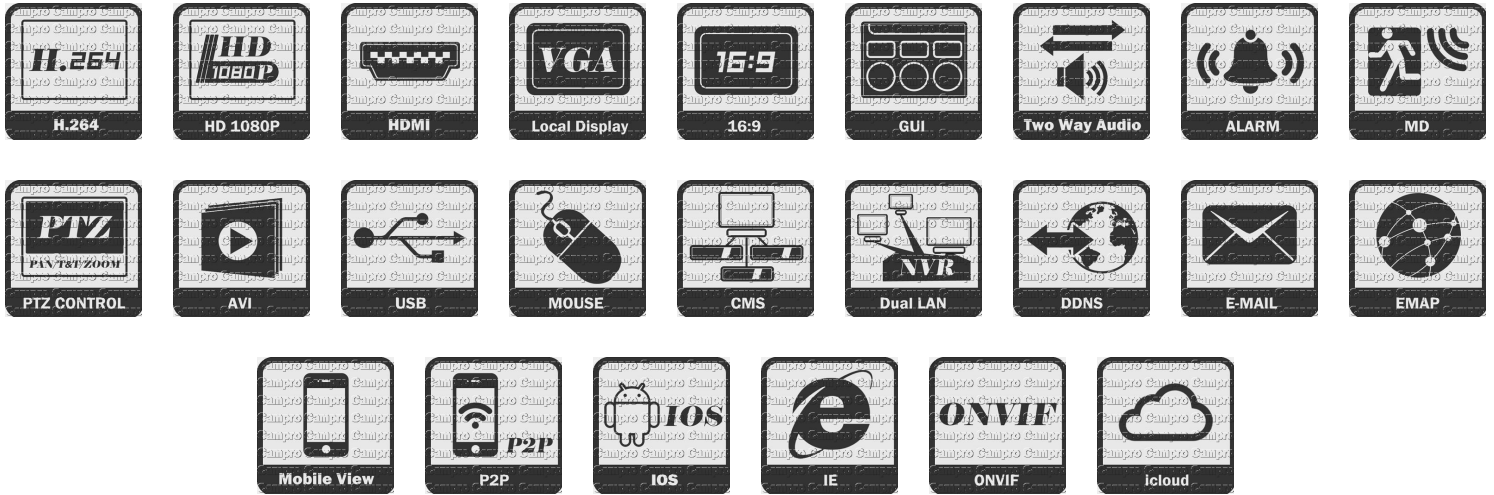

	CP-HDR-7804	CP-HDR-7808	CP-HDR-7816
Channel & Compression	4CH BNC	8CH BNC	16CH BNC
System Format	PAL/NTSC		
Video Input	BNC x 4 (1.0Vp-p/75Ω)	BNC x 8 (1.0Vp-p/75Ω)	BNC x 16 (1.0Vp-p/75Ω)
Video Output	BNC x 1 (1.0Vp-p/75Ω), VGA x 1		
HDMI & VGA Output Res.	1024x768 / 1280x1024 / 1366x768 / 1920x1080		
D1 Record Frame Rate	4CHx25fps (PAL) 4CHx30fps (NTSC)	2CHx25fps + 6CHx6fps (PAL) 2CHx30fps + 6CHx6fps (NTSC)	16CHx25fps (PAL) 16CHx30fps (NTSC)
CIF Record Frame Rate	4CHx25fps (PAL) 4CHx30fps (NTSC)	8CHx25fps (PAL) 8CHx30fps (NTSC)	16CHx25fps (PAL) 16CHx30fps (NTSC)
D1 Playback Frame Rate	4CHx25fps (PAL) 4CHx30fps (NTSC)	2CHx25fps + 6CHx6fps (PAL) 2CHx30fps + 6CHx6fps (NTSC)	4CHx25fps (PAL) 4CHx25fps (NTSC)
CIF Playback Frame Rate	4CHx25fps (PAL) 4CHx30fps (NTSC)	8CHx25fps (PAL) 8CHx30fps (NTSC)	4CHx25fps (PAL) 4CHx25fps (NTSC)
Network Res./fps	CIF / QCIF		
Audio	4CH RCA input, 1CH RCA output		


Alarm	4CH input, 1CH output	
Alarm Trigger	Disk Full Alarm, Motion Detection Alarm, Video Loss Alarm	
Record Mode	Manual / Timing / Motion Detection	
Remote Control	100M RJ-45	
USB Port	Two USB 2.0 Host	
Hard Disk	1 x 5TB HDD	2 x 5TB HDD
DVD-RW	USB DVD-RW	
PTZ	RS-485	
Power	DC12V/2A	DC12V/3A
Power Supply	< 20W	
Operating Temp.	-10°C - 50°C, 10% - 90% Humidity	
Weight	About 2.8kg (including packaging)	
Dimension	370(L) x 290(W) x 45(H) mm	
Certification	CE / FCC / RoHS	

CP-HDR-7804

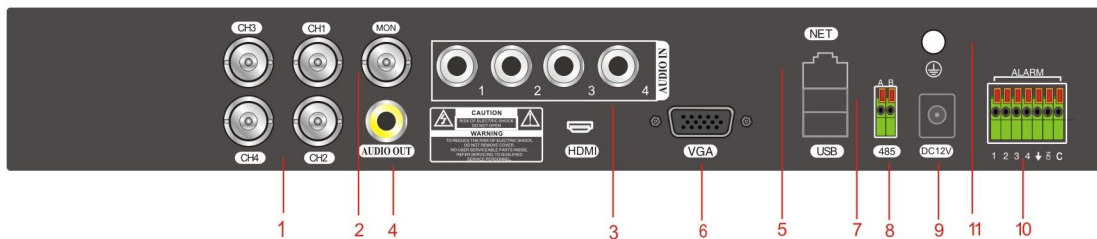


- 1、VIDEO IN
- 2、VIDEO OUT
- 3、AUDIO IN
- 4、AUDIO OUT
- 5、NET
- 6、VGA
- 7、USB PORT
- 8、RS 485
- 9、POWER
- 10、ALARM
- 11、GROUND CABLE

CP-HDR-7808

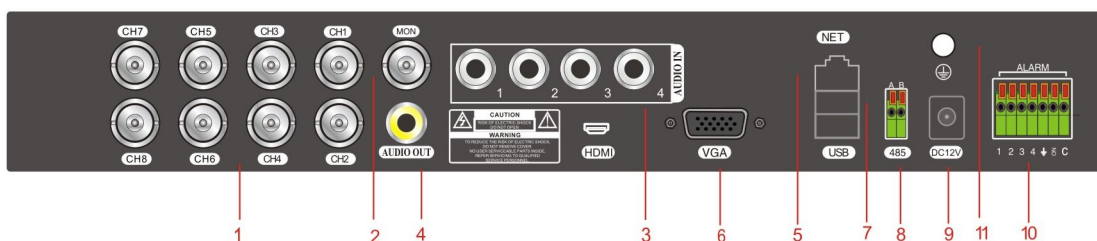

- 1、VIDEO IN
- 2、VIDEO OUT
- 3、AUDIO IN
- 4、AUDIO OUT
- 5、NET
- 6、VGA
- 7、USB PORT
- 8、RS 485
- 9、POWER
- 10、ALARM
- 11、GROUND CABLE

CP-HDR-7816

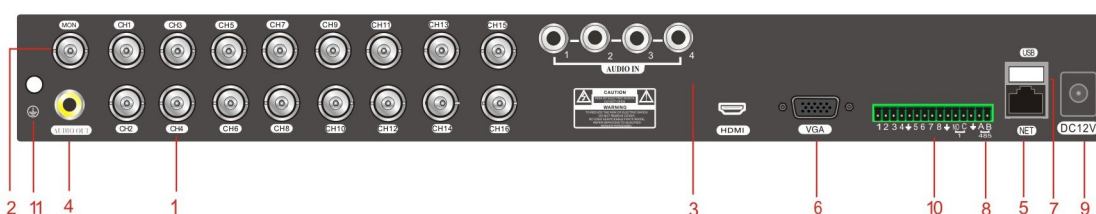

- 1、VIDEO IN
- 2、VIDEO OUT
- 3、AUDIO IN
- 4、AUDIO OUT
- 5、NET
- 6、VGA
- 7、USB PORT
- 8、RS 485
- 9、POWER
- 10、ALARM
- 11、GROUND CABLE