
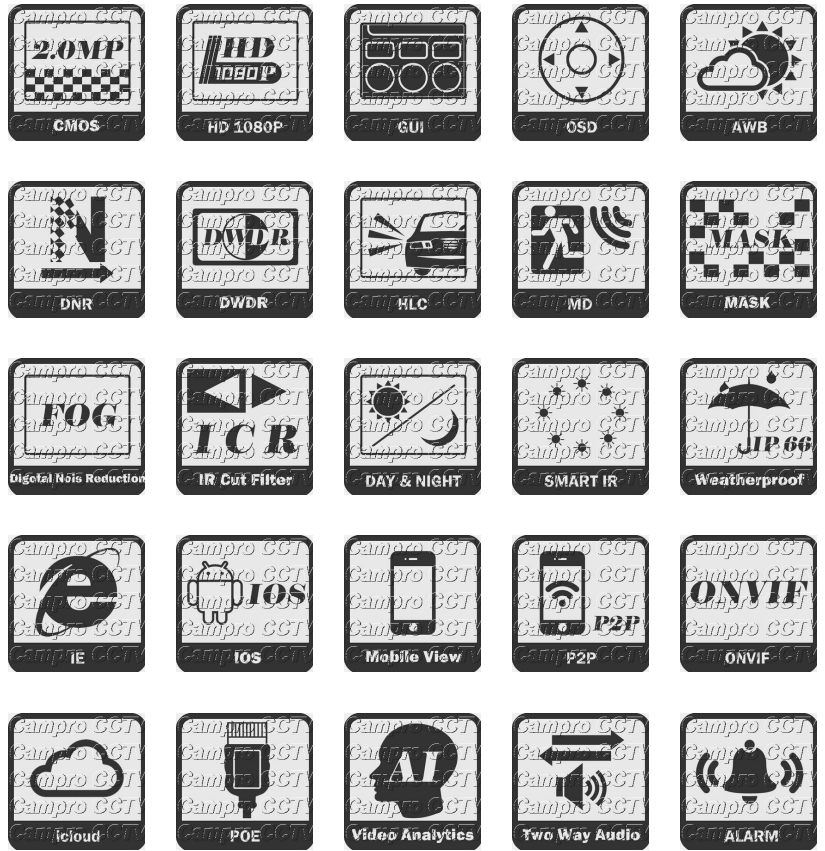


# Campro

## CB-RQ200P

### 2.0MP HD-IP 25M IR POE Camera

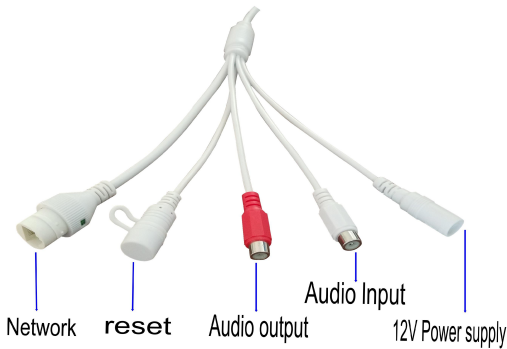

### CB-RQ200P

#### Digital Video Processor

<b>Sensor</b>	<b>Hi3516CV300 + SONY IMX 323</b>
<b>Frame Rate</b>	PAL: 1-25fps, NTSC: 1-30fps
<b>Minimum Illumination</b>	Color: 0.01Lux@F1.2(AGC ON), B/W: 0.001Lux@F1.2(AGC ON)
<b>Lens</b>	<b>3.6 / 6.0 / 8.0mm 3.0MP ICR Lens, Optional: 2.8mm 3.0MP ICR Lens</b>
<b>IR Range</b>	25M, 30pcs x Φ5mm IR Led
<b>Electronic Shutter</b>	Auto/1/25S-1/50000S adjustable
<b>Day / Night</b>	Auto, dual IR-Cut filter
<b>BLC / White Balance</b>	BLC: On/Off, AWB
<b>DNR</b>	2D + 3D DNR
<b>WDR</b>	D-WDR
<b>S/N Ratio</b>	≥52dB
<b>Image Control</b>	Bright, Sharpness, Contrast, Saturation
<b>Encode</b>	
<b>Video Encoding</b>	H.265+, H.265 Main Profile / H.264 High Profile / H.264 Main Profile / H.264 Baseline Profile
<b>Max Resolution</b>	Main Stream: 1920 x 1080@25/30fps, Sub Stream: 704 x 576@25/30fps
<b>Triple Stream</b>	Third Stream : 1280 x 720@25fps
<b>Bit Rate</b>	32Kbps~8Mbps, Supports CBR / VBR
<b>Audio Encoding</b>	G.711A(64Kbps) / G.711Mu(64Kbps) / G.726 (16Kbps)
<b>Reduce Echo</b>	Support

<b>Noise Filtering</b>	Support
<b>Interface</b>	
<b>LAN Ports</b>	RJ45 x1, 10M /100M
<b>Network Protocol</b>	TCP/IP, UDP, HTTP, IGMP, ICMP, DHCP, RTP/RTSP, DNS, DDNS, FTP, NTP, PPPOE, UPNP, SMTP
<b>Protocol</b>	ONVIF / CGI / GB28181
<b>Audio</b>	1CH Input, 1CH Output
<b>Alarm</b>	N/A
<b>Storage</b>	N/A
<b>RS485</b>	N/A
<b>Reset</b>	Built in Reset Button
<b>Function</b>	
<b>Motion Detection</b>	Multiple Detection Zones, Variable Sensitivity Levels
<b>Privacy Mask</b>	Up to 4 Areas
<b>Anti-Fog</b>	Support On/Off
<b>Corridor Mode</b>	Support
<b>ROI</b>	Support
<b>Snapshot</b>	Support JPEG format
<b>Security Features</b>	Pass word, Watermark
<b>Text Overlay</b>	Channel Name, Date & Time
<b>Alarm</b>	Support Network Anomaly, Mask Alarm etc.
<b>Smart Phone</b>	iOS, Android
<b>Intelligent Analysis</b>	
<b>Face Detection</b>	Face Detection,
<b>Perimeter Detection</b>	Intrusion, Object Missing & Left, Through Fence, Retrograde, Loitering, Color Cast, Out of Focus, Camera Movement, Counting, Density
<b>General Parameter</b>	
<b>Protection Level</b>	IP66
<b>Temp. / Humidity</b>	-15°C~+60°C / within 95% RH
<b>Power Consumption</b>	<3W
<b>Power Supply</b>	DC12V 2A / POE (IEEE802.3af)
<b>Case</b>	Metal, Indoor & Outdoor
<b>Dimension / Weight</b>	166(L) x 66(W) x 66(H)mm / 0.5KG
<b>Approvals</b>	
<b>Certification</b>	CE / FCC / RoHS