
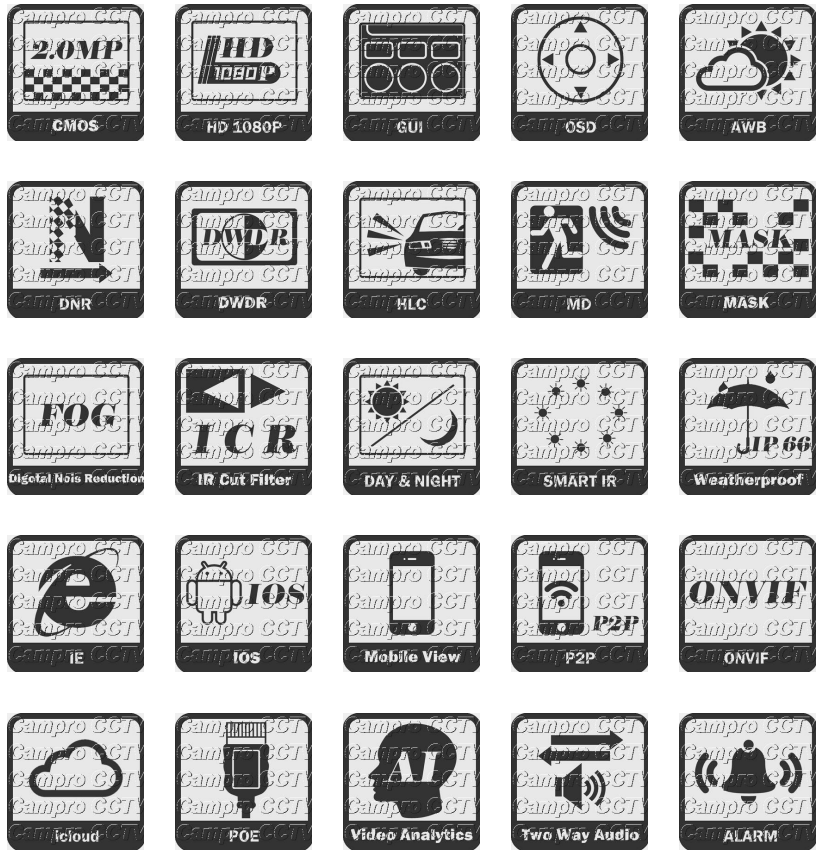


# Campro

## CB-RK200P

### 2.0MP HD-IP 30M IR POE Camera

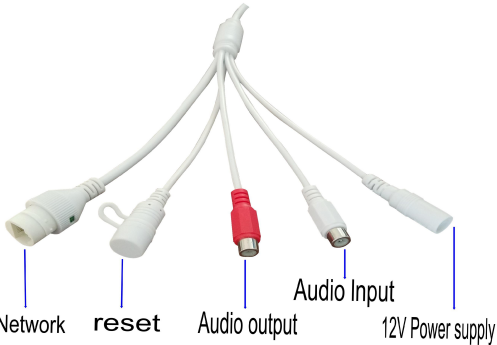

### CB-RK200P

#### Digital Video Processor

|                             |   |
|-----------------------------|---|
| <b>Sensor</b>               | <b>Hi3516CV300 + SONY IMX 323</b>   |
| <b>Frame Rate</b>           | PAL: 1-25fps, NTSC: 1-30fps   |
| <b>Minimum Illumination</b> | Color: 0.01Lux@F1.2(AGC ON), B/W: 0.001Lux@F1.2(AGC ON)                                       |
| <b>Lens</b>                 | <b>3.6 / 6.0 / 8.0mm 3.0MP ICR Lens, Optional: 2.8mm 3.0MP ICR Lens</b>                       |
| <b>IR Range</b>             | 30M, 36pcs x Φ5mm IR Led  |
| <b>Electronic Shutter</b>   | Auto/1/25S-1/50000S adjustable  |
| <b>Day / Night</b>          | Auto, dual IR-Cut filter  |
| <b>BLC / White Balance</b>  | BLC: On/Off, AWB  |
| <b>DNR</b>                  | 2D + 3D DNR   |
| <b>WDR</b>                  | D-WDR   |
| <b>S/N Ratio</b>            | ≥52dB   |
| <b>Image Control</b>        | Bright, Sharpness, Contrast, Saturation   |
| <b>Encode</b>               |   |
| <b>Video Encoding</b>       | H.265+, H.265 Main Profile / H.264 High Profile / H.264 Main Profile / H.264 Baseline Profile |
| <b>Max Resolution</b>       | Main Stream: 1920 x 1080@25/30fps, Sub Stream: 704 x 576@25/30fps                             |
| <b>Triple Stream</b>        | Third Stream : 1280 x 720@25fps   |
| <b>Bit Rate</b>             | 32Kbps~8Mbps, Supports CBR / VBR  |
| <b>Audio Encoding</b>       | G.711A(64Kbps) / G.711Mu(64Kbps) / G.726 (16Kbps)   |
| <b>Reduce Echo</b>          | Support   |

|                             |  |
|-----------------------------|--|
| <b>Noise Filtering</b>      | Support  |
| <b>Interface</b>            |  |
| <b>LAN Ports</b>            | RJ45 x1, 10M /100M   |
| <b>Network Protocol</b>     | TCP/IP, UDP, HTTP, IGMP, ICMP, DHCP, RTP/RTSP, DNS, DDNS, FTP, NTP, PPPOE, UPNP, SMTP  |
| <b>Protocol</b>             | ONVIF / CGI / GB28181  |
| <b>Audio</b>                | 1CH Input, 1CH Output  |
| <b>Alarm</b>                | N/A  |
| <b>Storage</b>              | N/A  |
| <b>RS485</b>                | N/A  |
| <b>Reset</b>                | Built in Reset Button  |
| <b>Function</b>             |  |
| <b>Motion Detection</b>     | Multiple Detection Zones, Variable Sensitivity Levels  |
| <b>Privacy Mask</b>         | Up to 4 Areas  |
| <b>Corridor Mode</b>        | Support  |
| <b>ROI</b>                  | Support  |
| <b>Snapshot</b>             | Support JPEG format  |
| <b>Security Features</b>    | Pass word, Watermark   |
| <b>Text Overlay</b>         | Channel Name, Date & Time  |
| <b>Alarm</b>                | Support Network Anomaly, Mask Alarm etc.   |
| <b>Smart Phone</b>          | iOS, Android   |
| <b>Intelligent Analysis</b> |  |
| <b>Face Detection</b>       | Face Detection,  |
| <b>Perimeter Detection</b>  | Intrusion, Object Missing & Left, Through Fence, Retrograde, Loitering, Color Cast, Out of Focus, Camera Movement, Counting, Density |
| <b>General Parameter</b>    |  |
| <b>Protection Level</b>     | IP66   |
| <b>Temp. / Humidity</b>     | -15℃~+60℃ / within 95% RH  |
| <b>Power Consumption</b>    | <3W  |
| <b>Power Supply</b>         | DC12V 2A / POE (IEEE802.3af)   |
| <b>Case</b>                 | Metal, Indoor & Outdoor  |
| <b>Dimension / Weight</b>   | 200(L) x 60(W) x 60(H)mm / 0.5KG   |
| <b>Approvals</b>            |  |
| <b>Certification</b>        | CE / FCC / RoHS  |